


B ROTATIVE NOZZLES



- The B Rotating Nozzle has been designed for operation with recycling water and fresh water. The cleverly built sliding bearing allows the use of every kind of recycled water.
- An integrated oil-free braking system results in a low wear and tear operation and in controlled numbers of rotation. In this way a most efficient and economic pipe cleaning is achieved
- The bore of the nozzle insert determines the admissible size of the dirt particles up to a maximum Ø1mm.
- Transport and water costs are noticeably reduced.
- The tool is practically maintenance-free
- Working pressure up to 200 bar
- LS: Slow turning. HS: Fast turning

Type	Min. Flow l/min a 100 bar	Application Ø Pipes	Thread connection	Dimensions (mm)	Weight (Kg)
400.037	40	40 - 200 mm	1/2"	Ø37 x 83	0,42
00100.03720	-	75 - 200 mm	1/2"	Ø60 x 110	0,25
400.060A 400.060B	100	100 - 300 mm	3/4" 1"	Ø60 x 150	2,04
402.080LS100 / 404.080HS100 402.080LS150 / 404.080HS150	100	125-400 mm 175-400 mm	1"	Ø100 x 225 Ø150 x 225	3,70
400.100A 400.100B	200	200 - 600 mm	1" 1 1/4"	Ø117 x 256	7,60

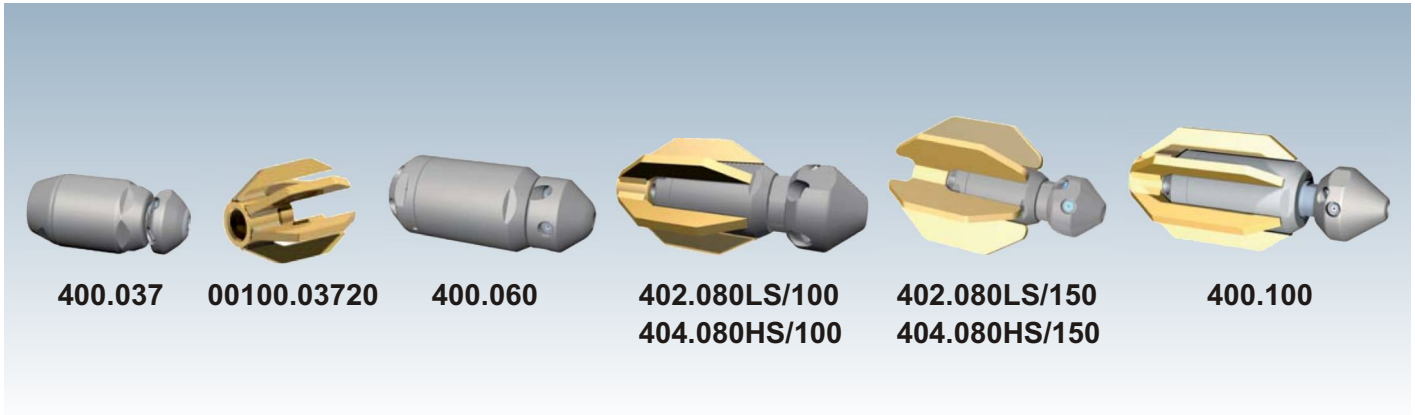