

ROTARY HEAD - BJV SERIES


Rotating head for working pressures up to 2.760 bar, made of stainless steel with control speed rotation by means of viscous fluid. 6 outlets or 7 with additional 15° forward jet. It works with 2, 4 or 6 balance jets.

APPLICATIONS

- Pipes from 155 to 1830 mm.
- Tanks, towers.
- Head exchanger housings.
- Etc.



Accessories

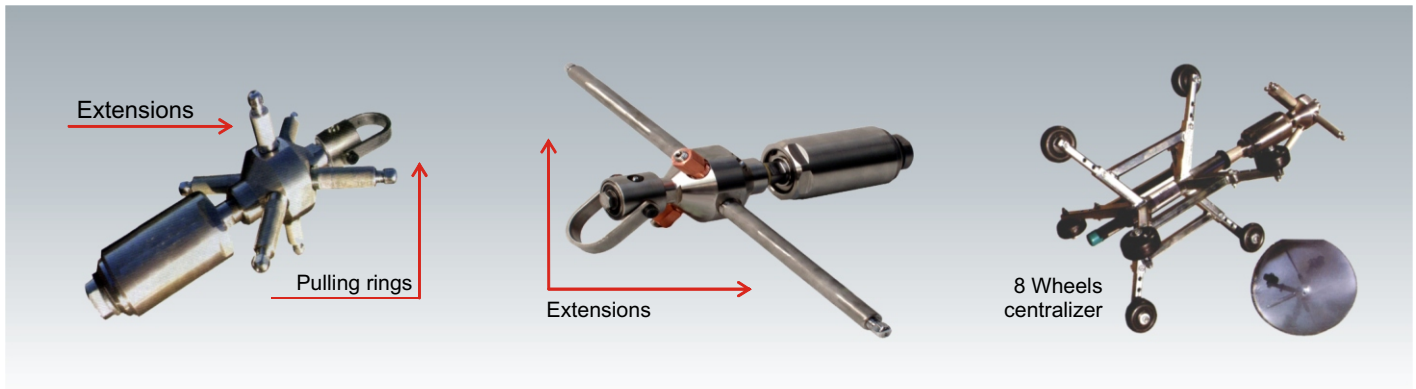

Body	Max. Pressure (bar)	R.P.M. (Fast)	R.P.M. (Slow)	Max. Flow (l/min)	Inlet connection	Weight (Kg)	Length (mm)
BJV-P16	690	-	30-80	760	1" npt	3,6	184
BJV-M	1.000	40-200	5-80	380	3/4" npt	3,6	184
BJV-20K	1.380	70-300	15-50	230	3/4" MP	3,6	213
BJV-H9	2.760	90-250	20-60	75	9/16" HP	3,6	213

Heads	Diameter (mm)	Outlet connection	Weight (Kg)	Body
BJ 041-P12	89	6 - 3/4" npt	2,3	BJV-P16
BJ 044-P4	76	6 or 7 - 1/4" npt	1,5	BJV-M
BJ 144-P4	76	6 or 7 - 1/4" npt	1,5	BJV-20K
BJ 444-S6	76	6 or 7 - 3/8", 24 Threads	1,5	BJV-H9

Heads	Diameter (mm)	Outlet connection	Weight (Kg)	Body
BJ 041-P8	89	6 - 1/2" npt	2,3	BJV-M
BJ 145-G12	89	6 - 3/4"	2,0	BJV-20K
BJ 441-G9	89	6 - 9/16"	1,5	BJV-H9

When ordering please indicate, pressure, flow, hose diameter and length.