


ROTARY HEADS - SURFACE CLEANING



The water pressure goes out by the nozzles, suitably located, giving revolving action to the jets increasing productivity in comparison with straight or fan nozzles in surface cleaning works.



Type	Max. Pressure (bar)	Max. Flow recommended* (l/min)	Thread	Diameter (mm)	Length (mm)	Weight (Kg)
300	390	40	BSPP 1/4" M	36	84	0,12
400	560	80	BSPP 1/2" F	64	115	0,50
Turbo 250	250	40	BSPP 1/4" F	45	95	0,40
Turbo 300	300	40	BSPP 1/4" F	53	110	0,60
Turbo 350	350	40	BSPP 1/4" F	58	115	0,74
Turbo 500	500	50	BSPP 3/8" - 1/2" - 1/4" F	43	109	0,62
Turbo 800	800	40	BSPP 3/8" - 1/2" - 1/4" F	43	130	0,66
Turbo 1000	1000	30	BSPP 3/8" - 1/2" - 1/4" F	50	134	1,20
Turbo 1500	1500	25	M14 or 9/16 LH	50	134	1,25
Turbo 2500	2500	20	M14 or 9/16 LH	50	134	1,30

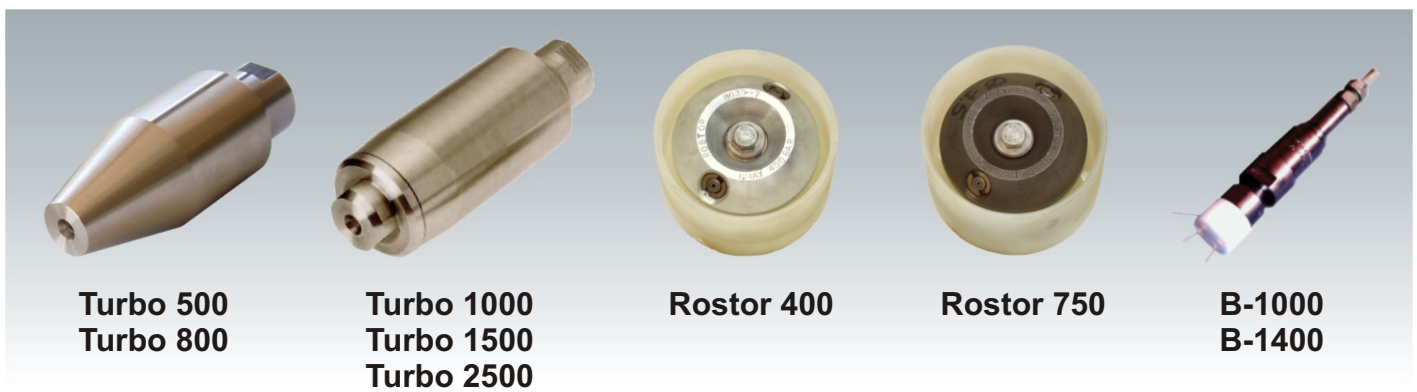

Type	Max. Pressure (bar)	Max. Flow recommended* (l/min)	Thread	Diameter (mm)	Length (mm)	Weight (Kg)
Rostor 400	400	70	BSPP 3/8" F	99	87	0,80
Rostor 750	750	45	BSPP 3/8" F	99	87	1,30
B-1000	1000	40	NPT 1/2" F	46	200	1,30
B-1400	1400	30	UNF 9/16" F	46	200	1,30

* Maximum recommended flow so that the worker can support the reaction force.