

ROTATING HEAD - T TYPE

Self-powered rotating head for tank cleaning 3-D T Type

- Pressures from 350 to 1,500 bar.
- Max flow 300 l/min.
- Internal adjustable magnetic brake.
- Easy maintenance.

Designed head for work with a wide range of pressures and flows. Four different rotors fit the head and make it suitable for use in different ranges of features.


Another important quality rotary head T is the simplicity of design. The rotating head T does not have to be shipped to the factory for repair, improving maintainability and reducing its downtime, because it uses very few parts and can be assembled with common hand tools.



- Shockproof safety: If the arms hit against interferences, they stop spinning and gears won't broke.
- Leakage-witness holes; allowing user to know that seal leaks water and it is damaged.
- Accessible grease fittings to lubricate each area of friction from the outside.

Pressure bar	Flow l/m	Power CV	Cycle time min	* Inlet thread	Diameter mm	Weight Kg
350 - 1.500	64 - 300	30 - 1000	4 - 28	3/4" or 1" npt	130	16

* On request other types of thread connections

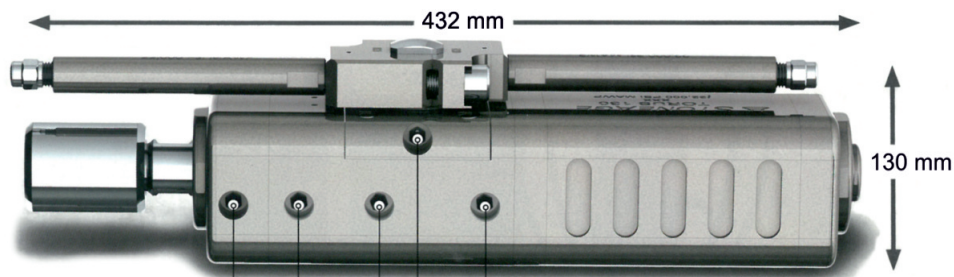

All grease fittings are directly accessible